

Environmental product declaration

in accordance with ISO 14025, ISO 21930 and EN 15804

Steni Colour Reuse - Reused Panels



The Norwegian EPD Foundation

Owner of the declaration:

Steni AS

Steni Colour Reuse - Reused Panels

Declared unit:

1 m²

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR and NPCR - Part B 010 Part B for Building Boards. Ver. 3.0

NPCR 010:2019 Part B for Building boards

Program operator:

The Norwegian EPD Foundation

Declaration number:

Registration number:

Issue date:

Valid to:

28.09.2027

EPD Software:

LCA.no EPD generator ID: 53164

General information

Product

Steni Colour Reuse - Reused Panels

Program operator:

Post Box 5250 Majorstuen, 0303 Oslo, Norway
The Norwegian EPD Foundation
Phone: +47 23 08 80 00
web: post@epd-norge.no

Declaration number:

Pending publication with EPD-Norge

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR and
NPCR - Part B 010 Part B for Building Boards. Ver. 3.0
NPCR 010:2019 Part B for Building boards

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 m² Steni Colour Reuse - Reused Panels

Declared unit with option:

A1-A3,A4,A5,B2,C1,C2,C3,C4,D

Functional unit:

1 m² covering surface of installed building board with a specific function, from cradle-to-grave, with activities needed for a study period of 60 years for the building

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the process is reviewed annually. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Michael M. Jenssen, Asplan Viak AS
(no signature required)

Owner of the declaration:

Steni AS
Contact person: Herleif Rimstad
Phone: + 47 926 35 625
e-mail: herleif.rimstad@steni.no

Manufacturer:

Steni AS

Place of production:

Steni AS
Lågendsveien 2633
3277 STEINSHOLT, Norway

Management system:

ISO 9001:2015, sert. no.: 0102916

Organisation no:

918 150 145

Issue date:

Valid to:

28.09.2027

Year of study:

2020

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Collected/registered by: Jan Marius Kruse

Reviewer of company-specific input data and EPD: Jan Marius Kruse

Approved:

Sign

Håkon Hauan, CEO EPD-Norge

Product

Product description:

Steni Colour Reuse is a robust stone-composite panel with a smooth surface designed for use as exterior ventilated cladding on all types of buildings. The panels consist of several layers of materials that are hardened and cured to give durability and a long-lasting surface. Steni Colour Reuse is delivered in a wide range of colours and three gloss variations. Low maintenance and a 60-year warranty secure low LCC.

Product specification

Steni Colour Reuse comes in 12 standard formats and drilling patterns specially designed for their reusability.

Materials	kg	%
Additives	0,06	0,46
Binder	2,63	19,28
Coating materials	0,12	0,84
Filler/aggregate	10,25	75,07
Reinforcement	0,59	4,35
Total	13,65	

Packaging	kg	%
Packaging - Plastic	0,01	2,49
Packaging - Wood	0,51	97,51
Total incl. packaging	14,17	

Technical data:

Steni Colour Reuse is 6mm thick fiberglass-reinforced stone composite panel with a core of crushed stone, with an average weight of 12kg/m². The panel comes in various colors, sizes and glosses.

The panel has SINTEF technical approval TG 2165.

Market:

Main markets; Europe, US, Canada, UAE.

Reference service life, product

The panel has 60 years as reference service life under normal conditions, assuming installation, use and maintenance instructions are followed.

Reference service life, building

60 years

LCA: Calculation rules

Declared unit:

1 m² Steni Colour Reuse - Reused Panels

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.


Materials	Source	Data quality	Year
Additives	ecoinvent 3.6	Database	2019
Binder	ecoinvent 3.6	Database	2019
Coating materials	ecoinvent 3.6	Database	2019
Filler/aggregate	ecoinvent 3.6	Database	2019
Packaging - Plastic	ecoinvent 3.6	Database	2019
Packaging - Wood	ecoinvent 3.6	Database	2019
Reinforcement	ecoinvent 3.6	Database	2019
Binder	ecoinvent 3.6	Database	2020
Additives	EPD-EFC-20210196-IBG1-EN	EPD	2021

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MNR	X	MNR	MNR	MNR	MNR	MNR	X	X	X	X	X

System boundary:

The analysis as shown includes "Cradel To Gate" with the modules A1-A3, and with options A4, A5, B2, C1,C2,C3 and C4.

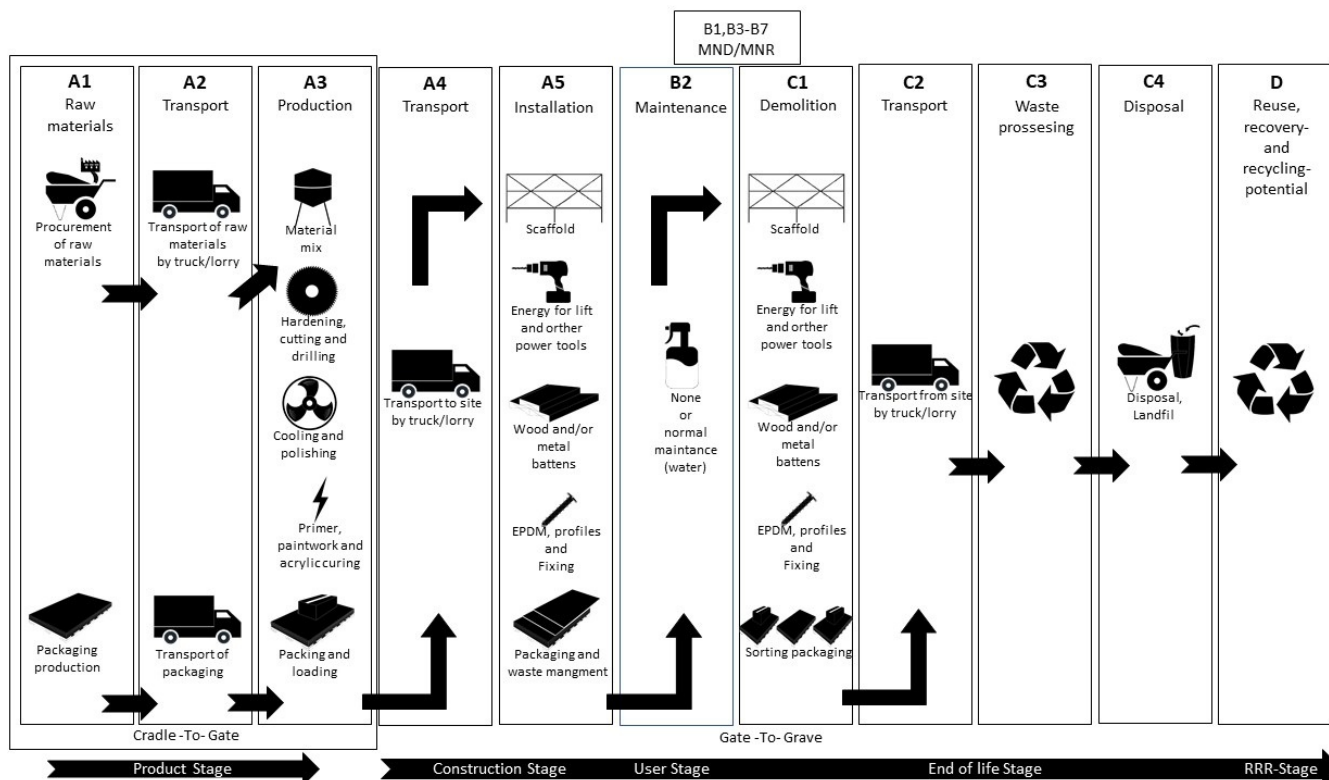

Additional technical information:

The panel has SINTEF technical approval TG 2165

Fire class: B-S1,d0 according to EN 13501-1.

Dimensional stability: 0,04% according to EN 438-2 part 18.

Thickness: 6mm according to EN 438-2 part 5.

The product is registered in:

Sunda Hus, Byggvarubedomningen, Nordic ECO Label.

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

The only maintenance needed is cleaning with water approximately every 10th year.

After end of life, the panels will be taken down and reused

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonn)
Truck, over 32 tonnes, EURO 6 (km)	53,3 %	300	0,023	l/tkm	6,90
Assembly (A5)	Unit	Value			
components to reuse	kg/DU	0,51			
Electricity mix, Norway	kWh/DU	0,01			
Waste, mixed plastic, to average treatment (kg)	kg	0,01			
Waste, packaging wood (kg)	kg	0,51			
Maintenance (B2)/Repair (B3)	Unit	Value			
Water (l)	kg/DU	0,03			
End of Life (C1, C3, C4)	Unit	Value			
Electricity mix, Norway	kWh/DU	0,01			
Transport to waste processing (C2)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonn)
Truck, 16-32 tonnes, EURO 6 (km)	36,7 %	50	0,043	l/tkm	2,15
Waste processing (C3)	Unit	Value			
Materials to reuse	kg/DU	11,40			
Disposal (C4)	Unit	Value			
Disposal of facade panels (C4)	kg/DU	0,60			
Benefits and loads beyond the system boundaries (D)	Unit	Value			
Substitution of Steni Colour (kg)	item/DU	0,00			

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact											
Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3	C4	D	
 GWP-total	kg CO ₂ -eq	5,04E-01	3,14E-01	1,97E-02	1,04E-05	1,06E-04	9,81E-02	0,00E+00	2,54E-03	-1,08E+00	
 GWP-fossil	kg CO ₂ -eq	1,27E+00	3,14E-01	1,96E-02	1,03E-05	1,02E-04	9,80E-02	0,00E+00	2,54E-03	-1,12E+00	
 GWP-biogenic	kg CO ₂ -eq	-7,64E-01	1,34E-04	6,98E-05	6,48E-08	3,04E-06	4,06E-05	0,00E+00	0,00E+00	3,99E-02	
 GWP-luluc	kg CO ₂ -eq	7,40E-04	9,55E-05	4,05E-06	1,67E-08	4,50E-07	3,49E-05	0,00E+00	5,21E-07	-5,70E-04	
 ODP	kg CFC11 -eq	1,26E-07	7,56E-08	2,25E-09	1,00E-12	7,00E-12	2,22E-08	0,00E+00	1,24E-09	-1,14E-07	
 AP	mol H+ -eq	7,41E-03	1,01E-03	1,13E-04	6,00E-08	4,11E-07	2,82E-04	0,00E+00	2,48E-05	-5,70E-03	
 EP-FreshWater	kg P -eq	3,81E-05	2,49E-06	1,71E-07	8,22E-10	4,37E-09	7,83E-07	0,00E+00	1,58E-07	-3,42E-05	
 EP-Marine	kg N -eq	1,24E-03	2,21E-04	4,81E-05	9,51E-09	7,16E-08	5,57E-05	0,00E+00	9,44E-06	-1,05E-03	
 EP-Terrestrial	mol N -eq	1,39E-02	2,47E-03	5,16E-04	1,11E-07	8,96E-07	6,23E-04	0,00E+00	1,04E-04	-1,20E-02	
 POCP	kg NMVOC -eq	6,20E-03	9,68E-04	1,33E-04	3,48E-08	2,35E-07	2,39E-04	0,00E+00	2,96E-05	-5,43E-03	
 ADP-minerals&metals ¹	kg Sb -eq	1,64E-05	5,59E-06	2,30E-07	2,88E-10	2,57E-09	2,71E-06	0,00E+00	4,79E-09	-1,14E-05	
 ADP-fossil ¹	MJ	2,01E+01	5,09E+00	1,66E-01	1,76E-04	1,42E-03	1,48E+00	0,00E+00	8,25E-02	-1,73E+01	
 WDP ¹	m ³	5,64E+01	3,90E+00	5,20E-01	3,15E-03	2,64E-01	1,43E+00	0,00E+00	2,56E-04	-5,04E+01	

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

*Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

3. Eutrophication aquatic freshwater shall be in kg P -eq., there is a typo in EN 15804:2012+A2:2019 regarding this unit. Eutrophication calculated as PO₄-eq is presented on page 11

Remarks to environmental impacts

Additional environmental impact indicators

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3	C4	D
 PM	Disease incidence	7,70E-08	2,88E-08	1,37E-09	1,00E-12	4,00E-12	6,00E-09	0,00E+00	5,41E-10	-5,70E-08
 IRP ²	kgBq U235 -eq	4,25E-02	2,23E-02	6,25E-04	1,22E-06	2,72E-05	6,48E-03	0,00E+00	4,06E-04	-3,53E-02
 ETP-fw ¹	CTUe	3,73E+01	3,72E+00	2,00E-01	1,90E-04	2,49E-03	1,10E+00	0,00E+00	4,45E-02	-3,42E+01
 HTP-c ¹	CTUh	3,59E-09	0,00E+00	2,00E-11	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,00E-12	-5,70E-09
 HTP-nc ¹	CTUh	3,87E-08	3,60E-09	9,99E-10	1,00E-12	3,00E-12	1,20E-09	0,00E+00	2,00E-11	-3,42E-08
 SQP ¹	dimensionless	2,26E+01	5,84E+00	9,31E-02	4,91E-05	6,70E-04	1,04E+00	0,00E+00	1,83E-01	-7,08E+00

PM Particulate Matter emissions; IRP Ionizing radiation – human health; ETP-fw Eco toxicity – freshwater; HTP-c Human toxicity – cancer effects; HTP-nc Human toxicity – non cancer effects; SQP Soil Quality (dimensionless)

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Resource use											
Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3	C4	D	
 PERE	MJ	-2,35E+00	6,41E-02	2,30E-02	2,39E-05	1,96E-02	2,12E-02	0,00E+00	1,62E-03	-2,15E+00	
 PERM	MJ	7,07E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-3,36E-01	
 PERT	MJ	4,71E+00	6,41E-02	2,30E-02	2,39E-05	1,96E-02	2,12E-02	0,00E+00	1,62E-03	-2,49E+00	
 PENRE	MJ	2,14E+01	5,09E+00	1,66E-01	1,76E-04	1,43E-03	1,48E+00	0,00E+00	8,25E-02	-1,90E+01	
 PENRM	MJ	1,24E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-7,01E-01	
 PENRT	MJ	2,26E+01	5,09E+00	1,66E-01	1,76E-04	1,43E-03	1,48E+00	0,00E+00	8,25E-02	-1,97E+01	
 SM	kg	6,33E-03	0,00E+00	9,42E-05	6,45E-07	1,95E-06	0,00E+00	0,00E+00	0,00E+00	-3,99E-03	
 RSF	MJ	3,88E-02	2,24E-03	1,14E-04	1,91E-06	1,53E-05	7,59E-04	0,00E+00	0,00E+00	-3,42E-02	
 NRSF	MJ	1,70E-02	7,51E-03	1,15E-03	1,89E-06	4,03E-05	2,71E-03	0,00E+00	0,00E+00	-1,07E-02	
 FW	m ³	2,38E-02	5,80E-04	2,70E-04	3,02E-05	1,46E-04	1,58E-04	0,00E+00	9,89E-05	-2,17E-02	

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

End of life - Waste

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3	C4	D
 HWD	kg	2,39E-02	2,79E-04	5,32E-03	3,33E-08	2,69E-07	7,64E-05	0,00E+00	9,03E-08	-2,28E-02
 NHWD	kg	4,07E-01	4,43E-01	8,76E-03	2,13E-06	1,12E-04	7,21E-02	0,00E+00	6,00E-01	-3,53E-01
 RWD	kg	4,67E-05	3,48E-05	9,12E-07	1,03E-09	1,33E-08	1,01E-05	0,00E+00	5,62E-07	-3,99E-05

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

End of life - Output flow

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3	C4	D
 CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
 MFR	kg	1,40E-02	0,00E+00	1,09E-02	6,09E-07	1,54E-06	0,00E+00	0,00E+00	0,00E+00	-1,14E-02
 MER	kg	1,85E-03	0,00E+00	1,25E-06	1,89E-08	1,56E-07	0,00E+00	0,00E+00	0,00E+00	-1,71E-03
 EEE	MJ	3,82E-02	0,00E+00	3,58E-01	3,72E-08	1,57E-07	0,00E+00	0,00E+00	0,00E+00	-3,59E-02
 EET	MJ	5,78E-01	0,00E+00	5,41E+00	5,64E-07	2,37E-06	0,00E+00	0,00E+00	0,00E+00	-5,42E-01

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

Biogenic Carbon Content

Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	1,72E-04
Biogenic carbon content in accompanying packaging	kg C	2,10E-01

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Electricity mix, Norway	ecoinvent 3.6	21,18	g CO ₂ -eq/kWh

Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

Indoor environment

Not relevant

Additional Environmental Information

Environmental impact indicators EN 15804+A1 and NPCR Part A v2.0										
Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3	C4	D
GWP	kg CO ₂ -eq	1,25E+00	3,10E-01	1,94E-02	1,00E-05	1,19E-04	9,71E-02	0,00E+00	2,51E-03	
ODP	kg CFC11 -eq	1,20E-07	6,12E-08	1,85E-09	1,00E-12	9,00E-12	1,80E-08	0,00E+00	9,82E-10	
POCP	kg C ₂ H ₄ -eq	3,99E-04	3,84E-05	2,97E-06	3,24E-09	1,64E-08	1,18E-05	0,00E+00	6,25E-07	
AP	kg SO ₂ -eq	5,77E-03	6,54E-04	7,10E-05	4,68E-08	3,01E-07	1,94E-04	0,00E+00	1,84E-05	
EP	kg PO ₄ ³⁻ -eq	7,38E-04	7,10E-05	2,09E-05	5,66E-09	4,44E-08	2,06E-05	0,00E+00	4,08E-06	
ADPM	kg Sb -eq	1,64E-05	5,59E-06	2,30E-07	2,88E-10	2,57E-09	2,71E-06	0,00E+00	8,57E-02	
ADPE	MJ	1,95E+01	5,00E+00	1,62E-01	1,14E-04	1,43E-03	1,45E+00	0,00E+00	8,12E-02	
GWPIOBC	kg CO ₂ -eq	1,18E+00	3,14E-01	1,19E-04	1,04E-05	1,19E-04	9,81E-02	0,00E+00	2,51E-03	

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources; GWP-IOBC/GHG Global warming potential calculated according to the principle of instantaneous oxidation (except emissions and uptake of biogenic carbon)

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.
 ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.
 EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.
 ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.
 ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.
 Iversen et al., (2018) eEPD v3.0 - Background information for EPD generator system. LCA.no report number 04.18
 Vold, M. et al. (2020) EPD-generator for Steni AS, bakgrunnsinformasjon for verifisering, LCA.no report number 03.20
 NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.
 NPCR 010 Part B for Building Boards. Ver. 3.0 October 2019, EPD-Norge.

	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 23 08 80 00 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration: Steni AS Lågendalsveien 2633, 3277 STEINSHOLT	Phone: + 47 926 35 625 e-mail: herleif.rimstad@steni.no web: www.steni.com
	Author of the Life Cycle Assessment LCA.no AS Dokka 6B, 1671	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	Developer of EPD generator LCA.no AS Dokka 6B, 1671 Kråkerøy	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	ECO Platform ECO Portal	web: www.eco-platform.org web: ECO Portal